


System Section "Solar Green Roof Optigrün Solar FKD"

Variation: Optigrün Solar FKD 15°
 Orientation: East-west facing + portrait
 PV module: 1650 x 1000 mm

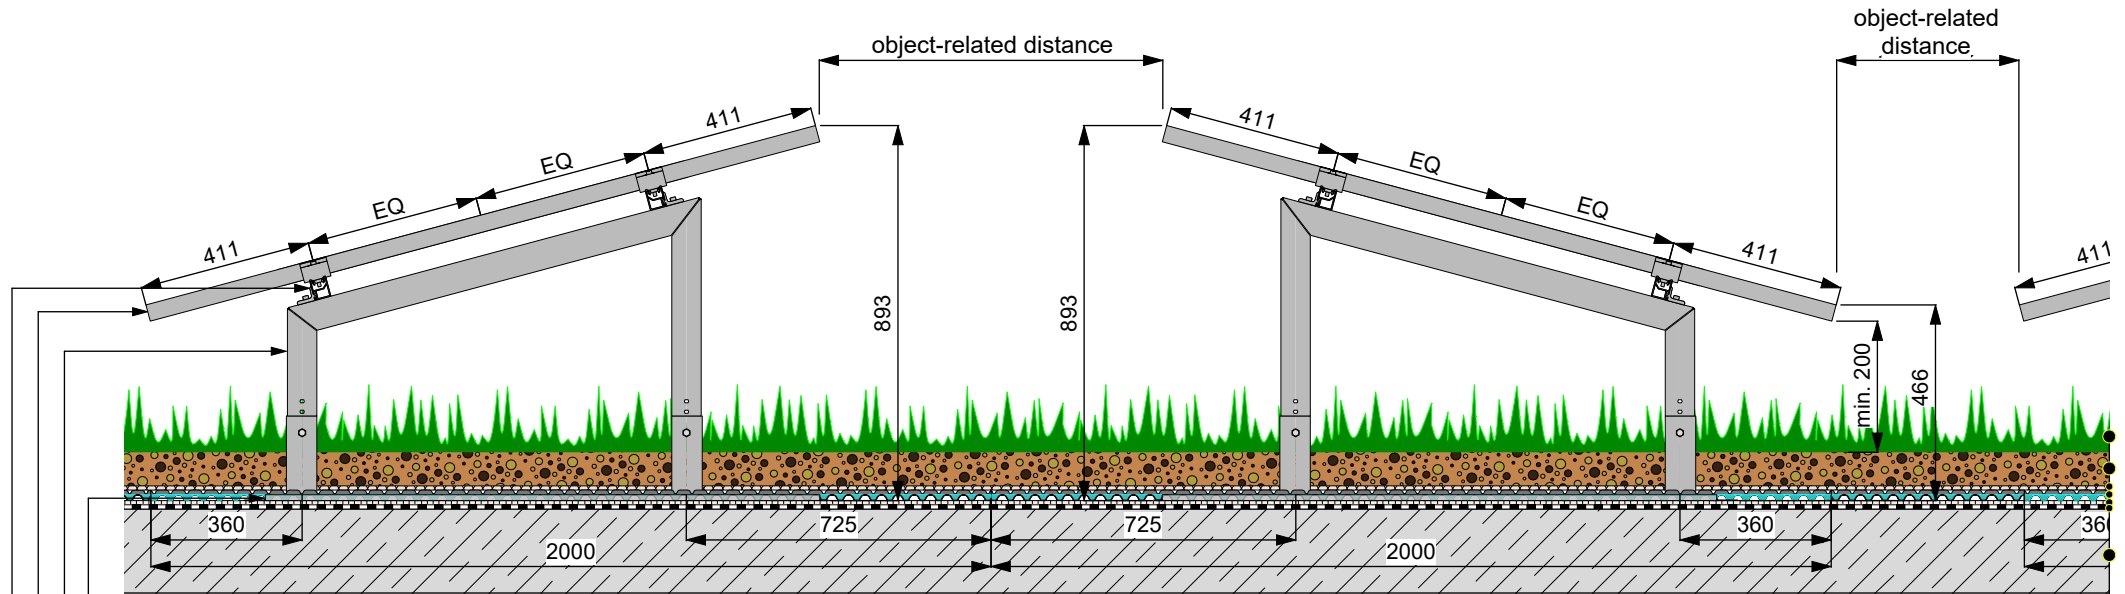

Optigrün Solar FKD 15°

- Base Plate for Optigrün Solar FKD
- Mounting Frame 15° for Optigrün Solar with Rail Fixings
- PV module
- Easy Mounting Rail with Module Clamps

Economy Roof

- Optigrün Sedum Cuttings
- Optigrün Extensive Substrate minimum 60 mm
- Optigrün Filter Fleece FIL 150
- Optigrün Drainage and Storage Board FKD 25
- Optigrün Protection and Storage Fleece RMS 500
- Waterproofing membrane (root resistant according to FLL)*
- Suitable substructure

* According to national regulations



The depicted solution is intended for use with green roof systems. Other construction tradework is simplified in this representation and should be constructed according to current industry standards. Optigrün reserves the right to make changes to its product solutions.

| | | | | | | | |
|-----------|-----|--------------------------------------|-----------|--------------|------------|-------|---------------|
| Approved: | com | ■ | drawn by: | scale: | update: | Rev.: | Detail-No.: |
| DG | | O | MH | not to scale | 11.01.2022 | 1 | SOL2.1200_UgD |

Reprinting is only permitted with the prior permission of the editors. No responsibility for printing errors. Subject to technical modifications.